

SKAGWAY (SGY)(PAGY) 0 NW UTC-9(-8DT) N59°27.61' W135°19.01'

JUNEAU

44 AOE LRA NOTAM FILE SGY

L-1B


RWY 02-20: H3550X75 (ASPH) MIRL 0.8% N

RWY 02: REIL. Trees.

RWY 20: REIL. Trees. Rgt tfc.

SERVICE: FUEL 100LL **LGT** ACTIVATE REIL Rwy 02 and Rwy 20, MIRL Rwy 02-20—CTAF. Rwy 02-20 REIL NSTD omnidirectional.

AIRPORT REMARKS: Unattended. For fuel call 907-983-2259 Mon-Fri 1700-0200z, OT call 907-612-0049. Arpt condition not monitored, arpt maintenance on irregular basis, recommend visual inspection prior to using. Birds and bears invof arpt. Recommend dalgt ops only. Arpt CLOSED to acft over 12,500 lbs GWT exc PPR in writing from arpt mgr 907-983-2323. CLOSED to air carrier ops with over 30 pax seats. Apch to Rwy 20 in narrow canyon; turbulence and high obstructions. Departing Rwy 02 rqrs a high performance climb due to terrain. Acft departing Rwy 02 may dog-leg to the east before turning crosswind to increase altitude. When departing Rwy 02 maintain rwy heading at least 1/2 mile before dog-legging to the east to avoid nearby school and playground. School and playground in vicinity of Rwy 20 approach. Parachute jumping onto arpt rwy, twy and acft parking apron prohibited. Extv lgt acft and helicopter tfc Jun 1-Sep 15, for further information call 907-983-2323. User fee arpt. See notice in Section C for recommended VFR departure procedure. Be alert: See General Notices for Rwy 02 departure info and Enroute CTAF freqs.

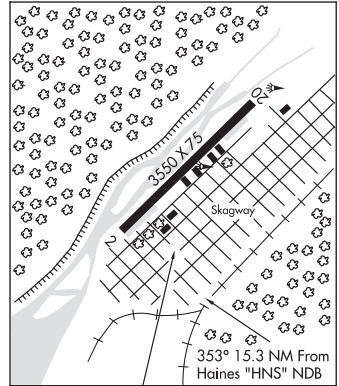

AIRPORT MANAGER: 907-983-2323

WEATHER DATA SOURCES: ASOS 135.8 (907) 983-3194. (WX CAM)

COMMUNICATIONS: CTAF 122.9

RCO 122.4 (JUNEAU RADIO)

RADIO AIDS TO NAVIGATION: NOTAM FILE HNS.

HAINES NDB (HW) 245 HNS N59°12.73' W135°25.85' 353° 15.3 NM to fld. 256/20E.

NDB unusable:

160°-330° byd 30 NM

330°-355° byd 30 NM blo 12,000'

356°-120° byd 30 NM

COMM/NAV/WEATHER REMARKS: For a toll free call to Juneau FSS dial 1-866-297-2236. Interphone avbl to Juneau FSS in refueling area. ASOS wx reports avbl continuously.

SKWENTNA (SKW)(PASW) 1 NE UTC-9(-8DT) N61°57.97' W151°11.72'

ANCHORAGE

148 B NOTAM FILE SKW

L-3D, 4F

RWY 10-28: 3400X75 (GRVL) MIRL

RWY 10: Brush.

RWY 28: Brush.

SERVICE: **LGT** ACTVT MIRL Rwy 10-28; windsock—122.9 ACTVT rotg bcn—CTAF.

AIRPORT REMARKS: Unattended. Rwy condition unmonitored. Recommend visual inspection prior to landing. ATV road crosses Rwy 10,900 ft fm thr. Soft during Spring thaw; two 100 ft twrs 1.5 NM west. NSTD mkgs Rwy 10 and 28 mkd with reflective cones. Thrs marked with reflective panels.

AIRPORT MANAGER: (907) 745-2159

COMMUNICATIONS: CTAF 122.9


RADIO AIDS TO NAVIGATION: NOTAM FILE ENA.

BIG LAKE (H) (H) VORTACW 112.5 BGQ Chan 72 N61°34.17' W149°58.03' 286° 42.4 NM to fld. 179/19E.

DME unusable:

096 radial within 40 NM blo 1,700'

COMM/NAV/WEATHER REMARKS: For a toll free call to Kenai FSS dial 1-866-864-1737.

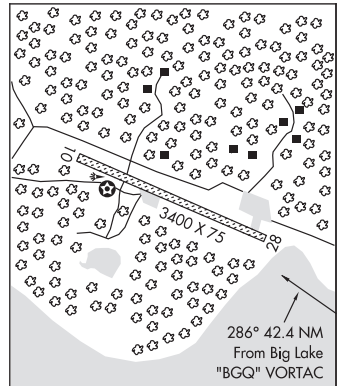

SKY RANCH AT PIONEER PEAK (See PALMER on page 191)