

ATWATER

CASTLE (MER)(KMER) 3 NE UTC-8(-7DT) N37°22.83' W120°34.09'

SAN FRANCISCO

190 B NOTAM FILE MER

H-3B, L-3B


RWY 13-31: H11802X150 (ASPH-CONC) S-155, D-200, 2S-175, 2D-415, 2D/2D2-720 HIRL

IAP, AD

RWY 13: ALSF1. PAPI(P4L)—GA 3.0° TCH 75'.

RWY 31: ALSF1. PAPI(P4L)—GA 3.0° TCH 71'. Rgt ttc.

SERVICE: S2 **FUEL** 100LL, JET A, A1 **LGT** ALSF1 Rwy 13 and Rwy 31 sequenced flashing lgts OTS indef. When twr is clsd **ACTIVATE** HIRL Rwy 13-31, ALSF1 Rwy 13 and Rwy 31—frequency 123.000, 3 clicks on, 5 clicks increase intensity, 7 clicks off. PAPI Rwy 13 and PAPI Rwy 31 opr continuously.

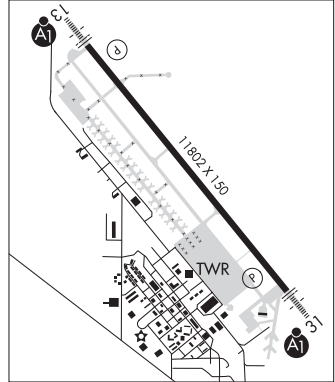

AIRPORT REMARKS: Attended 1700-0200Z†. For arpt information 209-385-7686. For fuel 0200-1700Z† call 209-725-1455. Rwy 31 will be the designated calm wind rwy (wind 5 kts or less). Opposite end of rwy not visible on tkf. Rwy 13-31 1,000' paved blast pad both ends of rwy. When twr is clsd opposite direction tkfs and ldfs are not authorized. Civilian and military training may occasionally cause pattern congestion. When twr clsd maximum of 5 acft permitted in VFR traffic pattern at any one time and 2000' ceiling and 3 miles visibility recommended. Twy B clsd to acft greater than 30,000 lbs. Rwy 13-31 180° turns prohibited.

AIRPORT MANAGER: 209-385-7686

WEATHER DATA SOURCES: AWOS-3 (209) 725-0104

COMMUNICATIONS: CTAF 118.175 **ATIS** 124.475 **UNICOM** 122.95

Ⓡ **NORCAL APP/DEP CON** 120.95

TOWER 118.175 (1500-0500Z†) **GND CON** 133.575

CLEARANCE DELIVERY PHONE: For CD when ATCT is clsd ctc NorCal Apch at 916-361-0516.

AIRSPACE: CLASS D svc 1500-0500Z†; other times CLASS G.

RADIO AIDS TO NAVIGATION: NOTAM FILE MCE.

EL NIDO (L) (L) VORW/DME 114.2 HYP Chan 89 N37°13.17' W120°24.01' 305° 12.6 NM to fld. 184/15E.

ILS 109.5 I-MER Rwy 31. LOC unusable byd 23° left and 25° right of course. Unmonitored 0500-1500Z† daily.

AUBURN MUNI (AUN)(KAUN) 3 N UTC-8(-7DT) N38°57.29' W121°04.90'

SAN FRANCISCO

1538 B TPA—See Remarks NOTAM FILE AUN

L-26, 3A

RWY 07-25: H3700X75 (ASPH) S-30 MIRL 1.2% up E

IAP

RWY 07: PAPI(P2L)—GA 3.0° TCH 21'. Thld dspcd 200'. Hill.

RWY 25: PAPI(P2L)—GA 3.5° TCH 34'. Hill.

SERVICE: S4 **FUEL** 100LL, JET A, A1 **OX** 1, 2, 3, 4 **LGT** Rwy 25 PAPI unusable byd 5° left of centerline. **ACTIVATE** PAPI Rwy 07, MIRL Rwy 07-25—CTAF. PAPI Rwy 25 opr continuously..



NOISE: Noise abatement all depts min pwr while observing safe acft ops. VFR noise abatement proc for Rwy 25 dep at end rwy track 230 over self-storage fac to avoid noise sensitive areas. Turn on crs after reaching 2500 MSL.

AIRPORT REMARKS: Attended 1600-0200Z†. Fuel 100LL and Jet A avbl 24 hrs. Ultralight activity on and invof arpt. Helicopter TPA-2118(580). Helicopter rgt ttc for Rwy 07. Clsd ttc comply with aim proc. Min pwr while obsg safe acft ops.

AIRPORT MANAGER: 530-888-8174

WEATHER DATA SOURCES: AWOS-3 119.375 (530) 888-8934.

COMMUNICATIONS: CTAF/UNICOM 122.7

Ⓡ **NORCAL APP/DEP CON** 125.4

CLEARANCE DELIVERY PHONE: For CD ctc NorCal Apch at 916-361-6874.

RADIO AIDS TO NAVIGATION: NOTAM FILE TVL.

PALISADES (VL) (DH) VORW/DME 113.2 SWR Chan 79 N39°10.82' W120°16.18' 235° 40.3 NM to fld. 8850/16E.

VOR unusable:

036°-048° byd 40 NM

112°-124° byd 40 NM blo 14,000'

112°-124° byd 53 NM