

SCOTTSDALE (SDL)(KSDL) 9 N UTC-7 N33°37.37' W111°54.63'

1510 B TPA—See Remarks NOTAM FILE SDL

RWY 03-21: H8249X100 (ASPH) S-45, D-75, 2S-95 MIRL

RWY 03: REIL. PAPI(P2L)—GA 4.0° TCH 59'. Thld dsplcd 740'. Tree. 0.7% up.

RWY 21: REIL. PAPI(P2L)—GA 4.0° TCH 40'. Thld dsplcd 400'. Hill. Rgt tfc. 0.9% down.

RUNWAY DECLARED DISTANCE INFORMATION

RWY 03: TORA-8249 TODA-8249 ASDA-7849 LDA-7110

RWY 21: TORA-8249 TODA-8249 ASDA-8069 LDA-7669

SERVICE: S4 FUEL 100LL, JET A1+ OX 1, 2, 3, 4 LGT When ATCT clsd ACTIVATE REIL Rwy 03 and Rwy 21; PAPI Rwy 03 and Rwy 21; MIRL Rwy 03-21—CTAF.

NOISE: Voluntary ns abtmt curfew 0500-1300Z. Extremely noise sensitive areas all quadrants. For ns abtmt info call 480-312-8478. No maintenance runups btn 0500-1400Z. Rwy 03 preferred for calm wind and ns abtmt.

AIRPORT REMARKS: Attended continuously. Coyotes ocnl crossing Rwy 03-21 and twys. Hawks invof Rwy 03-21. All mil acft provide 24 hr advance ntc prior to arr, call arpt ops 480-312-8478. Rwy 03-21 200 foot blast pad both ends. Ctc aviation director at 480-312-2321. Tran fee for acft 12,500 lbs or greater (based on max certificated ramp wgt). Tran over rgt parking fee. U.S. Customs user fee arpt. U.S. Customs svcs avbl 1600Z to 0200Z daily. Touch and go ldg permitted btn 1300-0430Z only. No midfield dep on Rwy 03 or Rwy 21. TPA-prop 2500(990); Jet 3000(1490); Helicopter 2000(490).

AIRPORT MANAGER: 480-312-2321

WEATHER DATA SOURCES: ASOS (480) 483-3049 ASOS bcsts on SDL ATIS freq (118.6) when SDL ATCT is clsd. LAWRS.

COMMUNICATIONS: CTAF 119.9 ATIS 118.6

PHOENIX RCO 122.2 (PRESCOTT RADIO)

® **PHOENIX APP/DEP CON 120.7**

TOWER 119.9 (1300-0400Z‡) **GND CON 121.6** **CLNC DEL 124.8**

CLEARANCE DELIVERY PHONE: For CD when ATCT clsd, ctc Phoenix Apch at 602-306-2565.

AIRSPACE: CLASS D svc 1300-0400Z; other times CLASS G.

RADIO AIDS TO NAVIGATION: NOTAM FILE PRC.

PHOENIX (H) VORTACW 115.6 PXR Chan 103 N33°25.98' W111°58.21' 003° 11.8 NM to fld. 1184/12E.

VOR unusable:

345°-360° byd 33 NM blo 10,000'

TACAN AZIMUTH & DME unusable:

345°-360° byd 33 NM blo 11,000'

VORTAC unusable:

015°-034° byd 33 NM blo 10,000'

090°-100° byd 15 NM blo 8,000'

185°-190° byd 30 NM blo 8,000'

185°-190° byd 38 NM blo 9,000'

190°-230° byd 20 NM blo 10,000'

345°-034° byd 10 NM blo 6,000'


345°-034° byd 20 NM blo 8,000'

360°-015° byd 33 NM blo 11,000'

DME unusable:

215°-315°

COMM/NAV/WEATHER REMARKS: Emerg frequency 121.5 not avbl at twr.

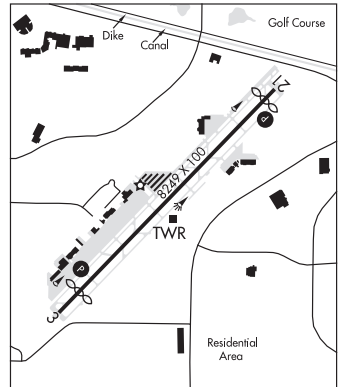

PHOENIX
H-4J, L-5B, A
IAP, AD