

SCAMMON BAY (SCM)(PACM) 0 N UTC-9(-8DT) N61°50.67' W165°34.43'
 22 B NOTAM FILE SCM
 RWY 10-28: 3001X75 (DIRT) MIRL

BETHEL
 L-3B
 IAP

RWY 28: Brush. Rgt tfc.

SERVICE: LGT ACTVT MIRL Rwy 10-28 and rotating bcn—CTAF.

AIRPORT REMARKS: Unattended. Rwy condition not monitored, recommend visual inspection prior to using. Birds on rwy. Cold temperature airport. Altitude correction required at or below -21C. Rwy 10-28 road used to cross rwy to river. Be alert: gusty crosswinds common. Rwy edges soft and sloughing towards tundra. Rwy 28 safety area soft and contains large rocks; only 75 ft usable. Rwy 10-28 soft durg spring breakup, after rains and durg extreme high tides. Wind indicators unreliable. Rwy 10-28 mkd with cones and reflective thr panels. Rwy 10 thr panels damaged or missing.

AIRPORT MANAGER: (907) 543-2498

WEATHER DATA SOURCES: AWOS-3P 118.425 (907) 558-5501. (WX CAM)

COMMUNICATIONS: CTAF/UNICOM 123.0

Ⓡ **ANCHORAGE CENTER APP/DEP CON** 124.5

RADIO AIDS TO NAVIGATION: NOTAM FILE HPB.

HOOPER BAY (H) (H) VOR/DME 115.2 HPB Chan 99 N61°30.86'
 W166°08.07' 026° 25.5 NM to fld. 15/13E.


VOR unusable:

358°-013° byd 22 NM blo 3,500'

DME unusable:

358°-013° byd 22 NM blo 3,500'

COMM/NAV/WEATHER REMARKS: For a toll free call to Kenai FSS dial 1-866-864-1737.

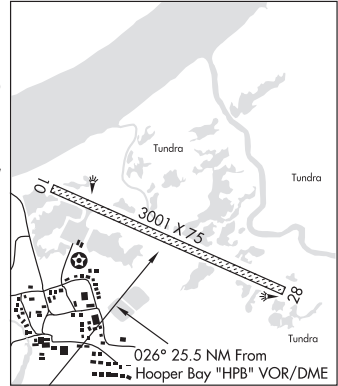

SCOOTERS LANDING STRIP (See STERLING on page 230)

SCOTTS (See NORTH POLE on page 183)

SECLUDED LAKE (See TALKEETNA on page 233)

SELAWIK

ROLAND NORTON MEML AIRSTRIP (8AK3) PVT 12 S UTC-9(-8DT) N66°45.96' W160°09.17'
 360 NOTAM FILE
 RWY 02-20: 3000X70 (GRVL)

NOME
 L-4I

RWY 20: Mtn.

AIRPORT REMARKS: Unattended. Rwy slopes downhill at 3% toward west. Rwy condition not monitored; recommend visual inspection prior to landing. Rwy marked with red and white 55 gallon drums.

COMMUNICATIONS: CTAF 122.7

COMM/NAV/WEATHER REMARKS: For LC to Kotzebue FSS dial 907-442-3310. For a toll free call to Kotzebue FSS dial 1-800-478-7460. For a toll free call to Fairbanks FSS dial 1-866-248-6516.