
DECATUR (DEC)(KDEC) P (NG) 4 E UTC–6(–5DT) N39°50.07′ W88°51.94′ **ST LOUIS**
682 B Class I, ARFF Index A NOTAM FILE DEC MON Airport **H–5E, L–27C**
IAP, AD

RWY 06–24: H8496X150 (ASPH–CONC–GRVD) S–120, D–250, 2S–175, 2D–550, 2D/2D2–1120 PCR 3280/F/D/X/T HIRL
RWY 06: MALSR. RVR–TM Road.
RWY 24: VASI(V4L)—GA 3.0° TCH 52′. RVR–MR
RWY 12–30: H6799X150 (ASPH–CONC–GRVD) S–120, D–250, 2S–175, 2D–550, 2D/2D2–1120 PCR 3250/F/D/X/T MIRL
RWY 12: Tree.
RWY 30: PAPI(P4L)—GA 3.0° TCH 51′.
RWY 18–36: H5298X150 (ASPH–GRVD) S–120, D–250, 2S–146, 2D–550, 2D/2D2–1035 PCR 1200/F/D/X/T MIRL
RWY 18: PAPI(P4L)—GA 3.0° TCH 53′. Trees.
RWY 36: VASI(V4L)—GA 3.0° TCH 58′. Pole.

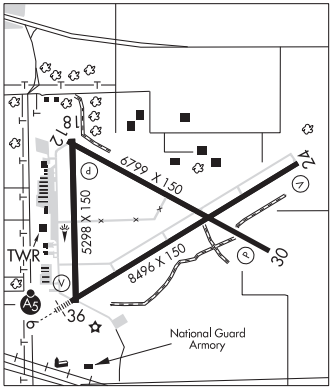

LAND AND HOLD–SHORT OPERATIONS

LDG RWY	HOLD–SHORT POINT	AVBL LDG DIST
RWY 06	12–30	4800
RWY 12	06–24	4450
RWY 18	06–24	4450
RWY 24	12–30	3000
RWY 30	18–36	5050
RWY 36	12–30	4800

RUNWAY DECLARED DISTANCE INFORMATION

RWY 06:	TORA–8496	TODA–8496	ASDA–8496	LDA–8496
RWY 12:	TORA–6799	TODA–6799	ASDA–6799	LDA–6799
RWY 18:	TORA–5298	TODA–5298	ASDA–5298	LDA–5298
RWY 24:	TORA–8496	TODA–8496	ASDA–8496	LDA–8496
RWY 30:	TORA–6799	TODA–6799	ASDA–6799	LDA–6799
RWY 36:	TORA–5298	TODA–5298	ASDA–5298	LDA–5298

SERVICE: **FUEL** 100LL, JET A **LGT** ACTVT MALSR Rwy 06; MIRL Rwy 12–30 and 18–36; twy lgts Rwy 06—CTAF. When ATCT clsd HIRL Rwy 06–24 preset low intst; incr intst—CTAF. **MILITARY— FUEL** (NC–100LL, A)

AIRPORT REMARKS: Attended Mon–Fri continuously, Sat–Sun 1300–0330Z‡. When the twr is clsd, be alert for intermittent vehicular tfc in arpt ops areas. Birds; deer and other wildlife on and invof arpt. Snow removal ops in progress winter months; vehicle opr will be monitoring CTAF; acft ldg/dep use CTAF when twr clsd. PPR for AARF index B call arpt manager. Rwy 12 and Rwy 18 apch ends are closely aligned. Rwy 06 and Rwy 36 apch ends are closely aligned. Verify correct rwy and compass heading prior to departure. N ramp from Hangar B to Hangar G closed to acft over 12,500 lbs. Twy A restricted north of Twy G to acft wingspan of 86′ or less without prior arpt authority permission. Call 217–428–2423. Glider ops by written approval only; contact arpt manager 217–428–2423. Glider ops allowed on Rwys 06 and 30 only. No sod ops. For U.S. Customs call 217–425–4803.

AIRPORT MANAGER: 217-428-2423

WEATHER DATA SOURCES: ASOS (217) 429–0052

COMMUNICATIONS: CTAF 118.9 **ATIS** 126.35 **UNICOM** 122.95
Ⓡ **CHAMPAIGN APP/DEP CON** 132.85 (1200–0500Z‡)
Ⓡ **CHICAGO CENTER APP/DEP CON** 121.35 (0500–1200Z‡)
TOWER 118.9 (1200–0400Z‡) **GND CON** 121.75

CLEARANCE DELIVERY PHONE: For CD when ATCT clsd ctc Champaign Apch at 217-355-4071, when Apch clsd ctc Chicago ARTCC at 630-906-8921.

AIRSPACE: CLASS D svc 1200–0400Z‡; other times CLASS G.

RADIO AIDS TO NAVIGATION: NOTAM FILE DEC.
ADDERS (VH) (H) VORTACW 117.2 AXC Chan 119 N39°44.25′ W88°51.39′ 353° 5.8 NM to fld. 708/3E.
ELWIN NDB (LOMW) 275 DE N39°47.43′ W88°57.23′ 058° 4.9 NM to fld. 695/1W.
ILS/DME 110.9 I–DEC Chan 46 Rwy 06. Class IE. LOM ELWIN NDB. Unmonitored when ATCT closed. LOC back unusable byd 20° right of course.

COMM/NAV/WEATHER REMARKS: Emerg frequency 121.5 not avbl at twr.