
NAPLES MUNI (APF)(KAPF) 2 NE UTC–5(–4DT) N26°09.15′ W81°46.54′ **MIAMI**
8 B Class I, ARFF Index A NOTAM FILE APF **H–8H, L–21D, 23B**
RWY 05–23: H6600X150 (ASPH–GRVD) D–75 PCR 210 F/B/X/T **IAP, AD**
MIRL
RWY 05: REIL. PAPI(P4R)—GA 3.5° TCH 31′. Thld dsplcd 800′. Road. Rgt tfc.
RWY 23: REIL. PAPI(P4L)—GA 3.5° TCH 49′. Thld dsplcd 799′. Fence.
RWY 14–32: H5001X100 (ASPH–GRVD) S–75, D–75 PCR 320 F/B/X/T MIRL
RWY 14: REIL. PAPI(P4L)—GA 3.5° TCH 41′. Thld dsplcd 128′. Trees. Rgt tfc.
RWY 32: REIL. PAPI(P4L)—GA 3.5° TCH 48′. Thld dsplcd 451′. Trees.
RWY NE–SW: 1850X100 (TURF)
RUNWAY DECLARED DISTANCE INFORMATION
RWY 05: TORA–5800 TODA–5800 ASDA–5800 LDA–5000
RWY 14: TORA–5001 TODA–5001 ASDA–4550 LDA–4422
RWY 23: TORA–5800 TODA–5800 ASDA–5800 LDA–5000
RWY 32: TORA–5001 TODA–5001 ASDA–4873 LDA–4422
SERVICE: S4 **FUEL** 100LL, JET A, A+, UL94 **OX** 3, 4 **LGT** When ATCT clsd ACTVT REIL Rwy 05, 14, 23 and 32; PAPI Rwy 14 and 32; MIRL Rwy 05–23 and 14–32—CTAF.

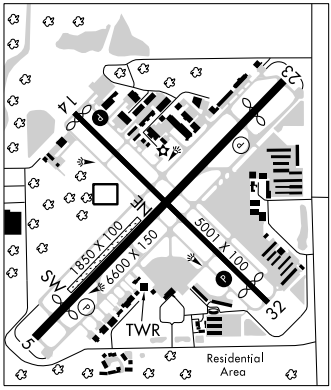

NOISE: Extmy noise sensitive area; use noise abatement procs. Voluntary restrictions exist for all acft ops 0300–1200Z‡.
AIRPORT REMARKS: Attended 1100–0300Z‡. Full svc fuel not avbl dly 0130–1030Z‡. Clsd to acft exceeding 75,000 lbs max GWT dual gear indcd on acft orpg cert issued by manufacturer. Runups NA 0300–1200Z‡; Twy A runup pads for Rwy 05–23 piston acft only; jet acft runup area Twy C btw Twy C3 and Twy D PPR—ATCT. Twy C fm C1 to ER Rwy 32 not visible fm ATCT. Rwy NE–SW mkd with pavers and PVC pipes. Rwy 23 dsgnd calm wind rwy for arrs 0300–1100Z‡. Rwy 5 dsgnd calm wind rwy for deps 0300–1100Z‡. APF GA apn ctn obst lgt poles. PPR US customs svc Mon–Sun 1530–0000Z‡ PPR—239–430–9321. Wx mod acft notify ops 24 hrs prior to arr 239–564–1692. US Customs and Border Protection User Fee Arpt.
AIRPORT MANAGER: 239-643-0733
WEATHER DATA SOURCES: ASOS 134.225 (239) 643–9886.
COMMUNICATIONS: CTAF 128.5 **ATIS** 134.225 (239) 643–5230
Ⓡ **FORT MYERS APP/DEP CON** 119.75 West 124.125 East (1100–0500Z‡)
Ⓡ **MIAMI CENTER APP/DEP CON** 134.75 (0500–1100Z‡)
TOWER 128.5 (1100–0300Z‡) **GND CON** 121.6 **CLNC DEL** 118.0
CLNC DEL 124.125 (When twr clsd, monitored by Fort Myers App Con)
CLEARANCE DELIVERY PHONE: For CD when ATCT clsd ctc Ft Myers Apch at 239-416-1026, when Apch clsd ctc Miami ARTCC at 305-716-1731.
AIRSPACE: CLASS D svc 1100–0300Z‡; other times CLASS G.
RADIO AIDS TO NAVIGATION: NOTAM FILE RSW.
LEE COUNTY (VL) (H) VORTACW 114.15 RSW Chan 88(Y) N26°31.79′ W81°46.55′ 182° 22.6 NM to fld. 25/2W.
VOR unusable:
025°–040° byd 40 NM
075°–095° byd 40 NM
110°–116° byd 40 NM
117°–127° byd 40 NM blo 2,300′
117°–127° byd 57 NM
CYPRESS (L) DME 108.6 CYY Chan 23 N26°09.21′ W81°46.69′ at fld. 9. NOTAM FILE APF.
DME unusable:
215°–315°
COMM/NAV/WEATHER REMARKS: UNICOM freq: For FBO svc ctc—128.825.

NAVARRE

FORT WALTON BEACH (1J9) 2 E UTC–6(–5DT) N30°24.38′ W86°49.75′ **NEW ORLEANS**
22 NOTAM FILE GNV
RWY 18–36: 2100X65 (TURF) 1.0% up N
RWY 18: Trees.
RWY 36: Brush.
AIRPORT REMARKS: Attended 1600Z‡–dusk. Hel more than 2500 lbs na. Dep Rwy 18; arr Rwy 36. Rwy slopes to 2 ft at S end. Unlgtd brush, trees, prkg and bldg 65–125 ft W of cntrln full len. Rwy 18–36 bare spots soft and sandy S of mid point. Rwy 18–36 white cones.
AIRPORT MANAGER: 850-244-1313
COMMUNICATIONS: CTAF/UNICOM 122.7
CLEARANCE DELIVERY PHONE: For CD ctc Eglin Apch 850-882-9152 or 850-882-9151.